

CODE BAR SWITCHES AND KEYBOARDS




COMPUTER CONTROL COMPANY, INC.

CODE BAR SWITCHES AND KEYBOARDS

3C Code Bar Switches* and Keyboards are high-reliability input devices for any system requiring octal or decimal to binary code conversion. Trouble-free encoding is accomplished with simple cam-type code bars and single-pole double throw snap action switches, instead of the multiple relay contacts usually employed for this purpose. A mechanical interlock permits only one pushbutton key to be depressed. Any previously depressed button is automatically released. High quality components and workmanship insure long, reliable service.

Both switches and keyboards are available in decimal or octal inputs, with parity, and with hermetic sealing for industrial use — can be provided to MIL E 5272 for airborne and ground based equipment. Specially coded or custom-built switches and keyboards are built to customer specifications.

*Patent pending

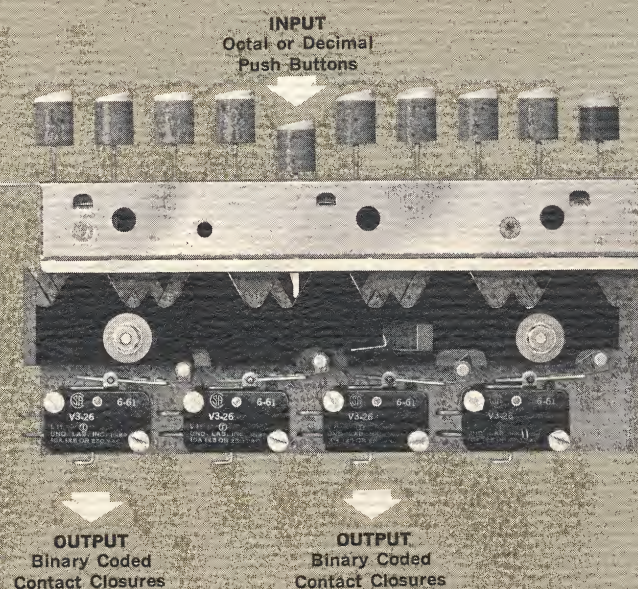

3C Code Bar Keyboards incorporate the dependable components and quality features of 3C Code Bar Switches. Applications include use in airborne, ground support or digital test equipment. Types available are:

Decimal ten button banks with 1-2-4-8 binary output contacts.

Octal eight button banks with 1-2-4 binary output contacts.

Parity keyboards with odd or even parity bit in either octal or decimal coding.

Industrial keyboards for process control systems, explosive or corrosive atmospheres, in either octal or decimal coding, with or without parity.

In addition, custom designed or specially coded keyboards can be built to customer specifications. Keyboards can be provided to MIL E 5272 for airborne and ground based equipment.

CODE BAR SWITCHES

DECIMAL

Model DS-1 has ten button decimal bank with 1-2-4-8 binary output contacts. Specially coded switches on request.

SWITCH TYPE

Micro Switch Model V3-26, single pole - double throw

DC CONTACT RATINGS

30 volts/6 amperes

AC CONTACT RATINGS

125 volts/10 amperes

FINISHES

Cadmium plated steel and anodized aluminum. Plastic push buttons.

TERMINALS

Solder-type

MOUNTING POSITION

Any

OVER-ALL DIMENSIONS

7" x 3½" x 5/8"

PUSH BUTTON DIAMETER

3/8"

PUSH BUTTON TRAVERSE

3/16"

PUSH BUTTON SPACING

5/8"

KEY PRESSURE

Approx. 12 ozs.

OCTAL

Model OS-1 has eight button octal bank with 1-2-4 binary output contacts. Model OS-2 has same features plus an entry switch coupled to the clear pushbutton. Specially coded switches on request.

SWITCH TYPE

Micro Switch Model V3-26, single pole - double throw

DC CONTACT RATINGS

30 volts/6 amperes

AC CONTACT RATINGS

125 volts/10 amperes

FINISHES

Cadmium plated steel and anodized aluminum. Plastic push buttons.

TERMINALS

Solder-type

MOUNTING POSITION

Any

OVER-ALL DIMENSIONS

7" x 3½" x 5/8"

PUSH BUTTON DIAMETER

3/8"

PUSH BUTTON TRAVERSE

3/16"

PUSH BUTTON SPACING

5/8"

KEY PRESSURE

Approx. 12 ozs.

PARITY

Decimal or octal coding plus either an odd or even parity bit. Model DP-1 has ten button decimal bank with 1-2-4-8-P binary output contacts. Model OP-1 has eight button octal bank with 1-2-4-P binary output contacts. Specially coded switches on request.

SWITCH TYPE

Micro Switch Model 11 SM-1, single pole - double throw

DC CONTACT RATINGS

30 volts/5 amperes resistive at sea level

AC CONTACT RATINGS

125 volts/5 amperes

FINISHES

Cadmium plated steel and anodized aluminum. Plastic push buttons.

TERMINALS

Solder-type

MOUNTING POSITION

Any

OVER-ALL DIMENSIONS

7" x 3½" x 5/8"

PUSH BUTTON DIAMETER

3/8"

PUSH BUTTON TRAVERSE

3/16"

PUSH BUTTON SPACING

5/8"

KEY PRESSURE

Approx. 12 ozs.

INDUSTRIAL

Designed for digital process control systems, this switch provides high reliability operation in industrial, explosive or corrosive atmospheres (up to 52 ppm hydrogen sulfide). All electrical contacts are hermetically sealed. All hardware is stainless steel with heavy chrome plated steel parts. Decimal input (DH Series), octal input (OH Series) and parity (DPH and OPH Series) versions are available. Specially coded switches on request.

SWITCH TYPE

Haydon 6100 Series hermetic, single pole - double throw

DC CONTACT RATINGS

28 volts/5 amperes resistive, 3 amperes inductive

AC CONTACT RATINGS

110 volts/ 5 amperes resistive, 60-400 cycles

FINISHES

Stainless steel hardware and springs. Heavy chrome plated steel parts. Plastic push buttons.

TERMINALS

Solder-type

MOUNTING POSITION

Any

OVER-ALL DIMENSIONS

7" x 3½" x 5/8"

PUSH BUTTON DIAMETER

3/8"

PUSH BUTTON TRAVERSE


3/16"

PUSH BUTTON SPACING


5/8"

KEY PRESSURE


Approx. 12 ozs.

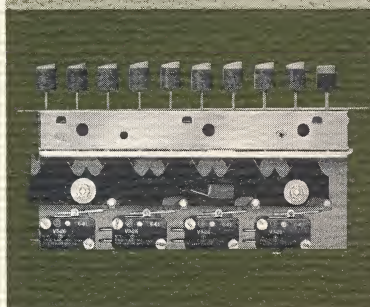


Decimal Switch

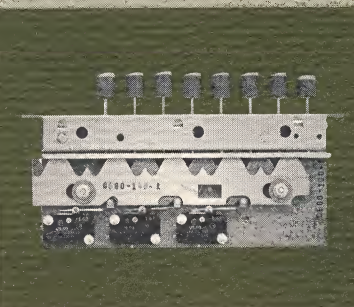

Octal Switch

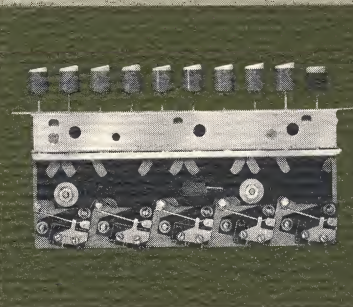

Parity Switch

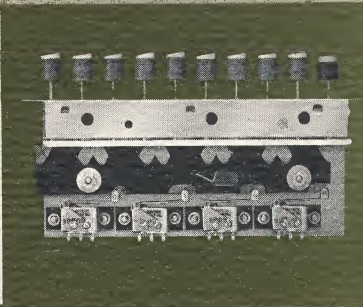

Industrial Switch

CODE BAR KEYBOARDS

MANUAL ENTRY

Model pictured is a 14-row decimal to binary (0 to 9 keys) keyboard with 1-2-4-8 binary output contacts. Two double pole - double throw Model V3-26 Micro Switches are operated by a momentary action Entry Bar.

MANUAL ENTRY WITH CLEAR


Entry Bar automatically clears the keyboard as the information is entered into the system. A switch on the Entry Bar closes prior to the clearing action. Model pictured below has 1-2-4 binary output contacts and additional special-purpose switches.

MANUAL ENTRY WITH REMOTE CLEAR


Solenoid release permits keyboard clearing by remote control. Model shown below consists of 6-row decimal to binary keyboard (0 to 9 keys) with 1-2-4-8 binary output contacts. Eight SM Series Micro Switches on each Code Bar Switch provide double pole - double throw coded output. Model meets MIL E 5272 specifications.



Manual Entry

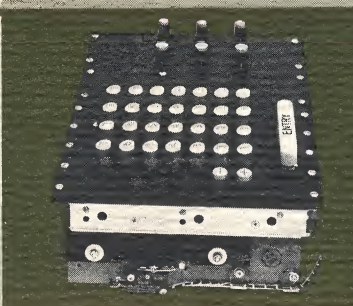

Manual Entry with Clear

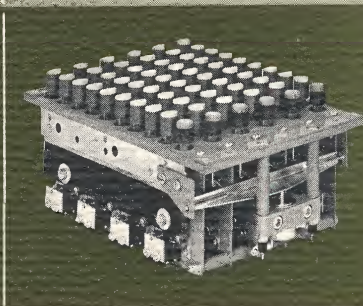

Manual Entry with Remote Clear

standard warranty

a) Computer Control Co. Inc., warrants all 3C products against defects in workmanship, materials, and construction under normal use and service for a period of ONE YEAR from the date of purchase except that liability for defective vacuum tubes, transistors, and snap action switches shall conform and be limited to the obligations of the original manufacturer's warranties covering these components.

b) This warranty does not extend to any of our products which have been subjected to misuse, neglect, accident, or improper installation or application. Nor shall it extend to products which have been repaired or altered outside of our factory.

c) For service under this warranty, please advise the factory promptly of all pertinent details. Transportation charges covering return of defective products to our factory shall be at our expense if such products are determined to be defective within the limitations of this warranty. Computer Control Co., Inc. will repair or replace the defective product in accordance with its own best judgment.

d) Computer Control Co., Inc. requests immediate notification for any claims arising from damage in transit in order to determine if carrier responsibility exists.

other 3C products and services

A major area of 3C specialization is the design, development and manufacture of special-purpose digital computers and systems.

3C is also a leading supplier of digital logic modules, shaft angle encoders, magnetostrictive delay lines and magnetic core memories.

prices

3C CODE BAR SWITCHES				
MODEL	QUANTITY			
	1-9	10-49	50-499	500 and over
DS-1 (decimal to 1-2-4-8)	\$ 67.50	\$ 60.75	\$ 54.00	\$ 50.60
OS-1 (octal to 1-2-4)	59.00	53.10	47.20	44.25
OS-2 (octal to 1-2-4 plus entry and clear)	67.50	60.75	54.00	50.60
DP-1 (parity version of DS-1)	85.00	76.50	68.00	63.75
OP-1 (parity version of OS-1)	67.50	60.75	54.00	50.60
DH-1 (industrial version of DS-1)	165.00	148.50	132.50	125.00
OH-1 (industrial version of OS-1)	147.50	132.50	117.50	110.00
DPH-1 (industrial parity version of DS-1)	195.00	176.00	157.00	148.50
OPH-1 (industrial parity version of OS-1)	165.00	148.50	132.50	125.00

Specially coded switches available. Price and delivery on request.

3C DISTRICT OFFICES

New England

Old Connecticut Path
Framingham, Massachusetts
Tel: Area Code 617
Boston, 235-6220
Framingham, 875-6185
TWX: 617-872-0653

Upper New York State

3001 James Street
Syracuse, New York
Tel: (315) 463-4534
TWX: 315-477-1357

Lower New York State

143 Main Street
Huntington, Long Island, N.Y.
Tel: (516) 271-1332
TWX: 516-421-4998

New Jersey, Delaware and Eastern Pennsylvania

8367 Bristol Pike
Levittown, Pennsylvania
Tel: (215) 943-2210
TWX: 215-945-3591

Ohio, Michigan, Indiana, Kentucky, West Virginia and Western Pennsylvania

5361 Pearl Road
Parma, Ohio
Tel: (216) 749-6516
TWX: 216-749-6436

Maryland, Virginia, North Carolina and District of Columbia

8485 Fenton Street
Silver Spring, Maryland
Tel: (301) 587-1712
TWX: 301-439-4916

Southeast

707 East Colonial Drive
Orlando, Florida
Tel: (305) 241-5609
TWX: 305-275-1231

Rocky Mountain States

1030 San Pedro, N.E.
Albuquerque, New Mexico
Tel: (505) 268-6714
TWX: 505-243-8307

Northern California, and the Northwest

Suite 324
701 Welch Road
Palo Alto, California
Tel: (415) 323-0277
TWX: 415-492-9423

Southern California

2251 Barry Avenue
Los Angeles 64, California
Tel: Area Code 213
BRadshaw 2-9135
or GRanite 8-0481
TWX: 213-490-3936

HOME OFFICE

Old Connecticut Path
Framingham, Massachusetts
Tel: Area Code 617
Boston, 235-6220
Framingham, 875-6185
TWX: 617-872-0653

WESTERN DIVISION

2251 Barry Avenue
Los Angeles 64, California
Tel: Area Code 213
BRadshaw 2-9135
or GRanite 8-0481
TWX: 213-490-3936



COMPUTER CONTROL COMPANY, INC.